


## Rustfri stålwire PYTHON/INOX 18x7/19x7

### Produkt information

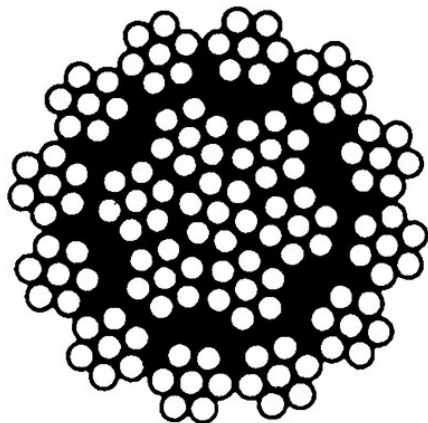

**Wirekonstruktion:** Stålwire i 18x7 AISI 316.  
**Materiale:** 1570 N/mm<sup>2</sup> (160 kp/mm<sup>2</sup>)

**Fyldfaktor:** 0.55  
**Tolerance Ø:** 0% til +4%

## Rustfri stålwire PYTHON/INOX 18x7/19x7

### Tekniske data

Varenummer	Wire diameter mm	Brudstyrke N/mm <sup>2</sup>	Overflade	Wireslåning	Minimum brudstyrke kN	Stål areal (mm <sup>2</sup> )	Smøring	Vægt kg/100m
108100403620229	4	1.570	Rustfri	zS	9,06	-	-	6,43
108100503620229	5	1.570	Rustfri	zS	13,28	-	-	10
108100603620229	6	1.570	Rustfri	zS	19,21	-	-	14,5
108100804620229	8	1.570	Rustfri	sZ	34,17	-	-	25,7
108100803620229	8	1.570	Rustfri	zS	34,17	-	-	25,7
108101003620229	10	1.570	Rustfri	zS	53,29	-	-	40,2
108101204620229	12	1.570	Rustfri	sZ	77,63	-	-	57,9
108101203620229	12	1.570	Rustfri	zS	77,63	-	-	57,9
108101404620229	14	1.570	Rustfri	sZ	107,5	-	-	78,8
108101403620229	14	1.570	Rustfri	zS	107,5	-	-	78,8
108101603620229	16	1.570	Rustfri	zS	135,31	-	-	103