


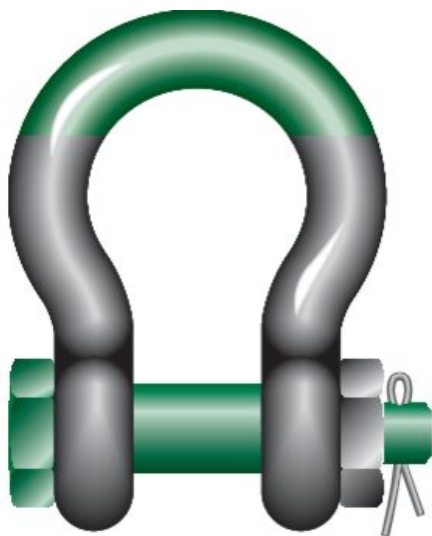

Super Shackle G-5263

Product information

Bow shackle with safety bolt.

Handling of the shackle is easy due to the smaller size and weight. The shackle also offers a double safety (split pin and safety bolt) which prevents accidental unscrewing of the pin. Furthermore, the long-term durability of the shackle is assured as a result of its galvanization. Wear and tear of the counter components such as wire rope is also minimized as the chamber in the shackle eye hides the screw thread.

Certification: This product can be supplied with works certificate, 3.1 material certificate, manufacturer test certificate, EC Declaration of Conformity. All shackles starting from 150 tons are supplied with a Lloyd's Register of Shipping Certificate on proof load.

Standard: Meets performance requirements of US Fed. Spec. RR-C-271 Type IVA Class 3, Grade B.

Material: Bow and pin alloy steel, quenched and tempered

Marking: CE-marked

Temperature range: -20°C up to +200°C

Finish: Hot dip galvanized (175 ton shackle is painted)

Note: Shackles with WLL 150 ton and 175 ton have a round headed bolt

Safety factor: 5:1

Grade: 8

Part code	WLL ton	Capacity max Reach	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm	Weight kg	Delivery time
420100330590	3.3	12	13.5	16	34	13	22	51	32	90	80	59	13	0.4	10
420100500590	5	22	16	19	40	16	27	64	43	110	98	75	17	0.73	2
420100700590	7	-	19	22	46	19	31	76	51	129	115	89	19	1.19	10
420100950590	9.5	-	22	25	52	22	36	83	58	144	130	102	22	1.73	10
420101250590	12.5	-	25	28	59	25	43	95	68	164	150	118	25	2.56	2
420101500590	15	-	28	32	67	28	47	108	75	186	166	131	27	3.6	2
420101800590	18	-	32	35	73	32	51	115	83	201	184	147	30	4.95	10
420102100590	21	-	35	38	79	35	57	133	92	227	197	162	33	6.62	10
420103000590	30	-	38	42	88	38	60	146	99	249	202	175	19	8.11	10
420104000590	40	-	45	50	104	45	74	178	126	300	243	216	23	14.8	10
420105500590	55	-	57	57	119	57	83	197	138	342	283	252	26	23.3	10
420108500590	85	-	70	70	145	70	105	260	180	438	339	320	32	45.1	10
420112000590	120	-	83	83	164	83	127	329	190	537	397	356	39	72	10
420115000590	150	-	95	95	204	95	147	400	238	644	453	428	50	116	10
420117500590	175	-	105	108	235	105	169	410	275	686	496	485	50	156	10

Blueprint

