

Weld-on Point 8-057

Product information



The eyes can be loaded with working load limit in all directions, pivots through 180°. Load rated parts are 100% magnaflux crack detected. Individual forged parts are traceable to Test Certification. Proof tested to 2.5 times the WLL, fatigue rated to 1.5 times the WLL. A protected spring keeps the load ring in a required position. The parts are connected in such a way that they remain captive. The spring also reduces noise caused by vibration.


Material: Manufactured from forged alloy steel, quenched and tempered.

Marking: According to standard, CE-marked, WLL, size, steel quality, manufacturer ID and traceability.

Standard: EN 1677-1

Weld-on Point 8-057

Blueprint

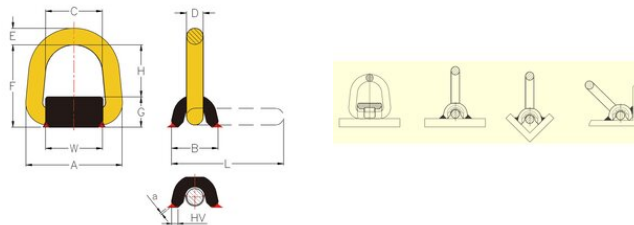

Technical data

Part code	WLL ton	A mm	B mm	C mm	D mm	E mm mm	F mm mm	G mm mm	H mm mm	L mm	W mm mm	HV mm mm	a mm mm	Weight kg	Delivery time
421580571T	1	83	41	48	14	14	86	27	58	109	50	5	3	0.5	2
421580573T	3	98	48	58	17	17	85	31	54	114	58	6	3	0.9	2
421580575T	5	120	63	66	22	22	118	41	77	157	64	7	3	1.3	10
421580578T	8	121	73	68	26	26	122	53	69	169	60	10	4	2.6	2
4215805710T	10	146	73	82	20	30	141	53	88	191	75	10	4	2.8	10