


## Anti-slip Mat Kargotec® Protect

### Product information

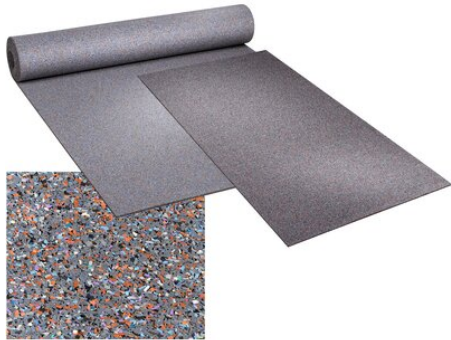

This anti-slip mat Kargotec® Protect, with an extremely high kinetic friction coefficient of  $\mu = 0.91$ , is the ideal solution, because it optimally counters a horizontal movement of the load (sliding).

**Thicknesses:** 6-10 mm

**Max. permissible surface load:** approx. 0.8 N/mm<sup>2</sup> (DIN EN ISO 1798)

**Elongation at break:** At least 120% (DIN EN ISO 1798).

**Material:** Recycled rubber granules, bonded with polyurethane

**Temperature range:** -30°C up to +100°C

**Finish:** Multi-coloured

## Anti-slip Mat Kargotec® Protect

---

### Technical data

Part code	Dimension mm	Id like to have more information	Delivery time
70982720100	6X1250X10000	Kargotec Protect	10