


Round Sling EXTREEMA® XS

Product information

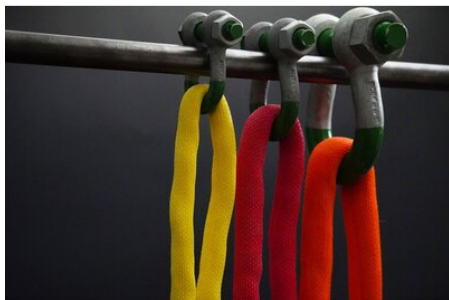

The XS round slings are the ultimate solution for lifting loads ranging from 1T to 20T. They offer a cost-effective and reliable alternative to traditional polyester slings. Say goodbye to the hassle of disposal, storage, and transportation costs, and welcome a practical and efficient choice that never compromises safety and quality.

Their lightweight design ensures easy handling and transport, making them a practical choice across various lifting applications. By embracing the XS round slings, industries secure a dependable lifting solution and embark on a sustainable journey, reducing industrial waste and minimizing their environmental footprint.

Extreema XS Slings have massive lifting power in a much smaller size with 78% less weight than polyester round slings and 55% smaller diameter, you can lift on the shackle pin. Slings are 8-10 times lighter than steel wire ropes.

Features and benefits:

- Saving costs
- D:d ratio of 1:1
- Environmentally friendly
- Light in weight
- Flexible
- Less storage
- Long life cycle
- Access to limited lifting space
- Safer lifting operations
- Improving workflow
- Available in 3t yellow, 5t red, 10t orange, 15t orange and 20t orange
- Available in effective working lengths in the range of 0.5 m up to 16 m ... [Read more](#)

Material: HMPE -Dyneema®

Marking: According to standard, CE-marked

Temperature range: -50°C up to +70°C

Standard: EN 1492-2

except material

Safety factor: 7:1

Round Sling EXTREEMA® XS

Technical data

Part code	WLL ton	EWL m	Colour
340500300050030	3	0.5	yellow
340500300080030	3	0.75	yellow
340500300100030	3	1	yellow
340500300150030	3	1.5	yellow
340500300200030	3	2	yellow
340500300250030	3	2.5	yellow
340500300300030	3	3	yellow
340500300400030	3	4	yellow
340500300500030	3	5	yellow
340500500050030	5	0.5	Red
340500500100030	5	1	Red
340500500150030	5	1.5	Red
340500500200030	5	2	Red
340500500250030	5	2.5	Red
340500500300030	5	3	Red
340500500400030	5	4	Red
340500500500030	5	5	Red
340501000150030	10	1.5	Orange
340501000200030	10	2	Orange
340501000300030	10	3	Orange
340501000400030	10	4	Orange
340501000500030	10	5	Orange