


Container Lifting Beam Type C and D

Product information

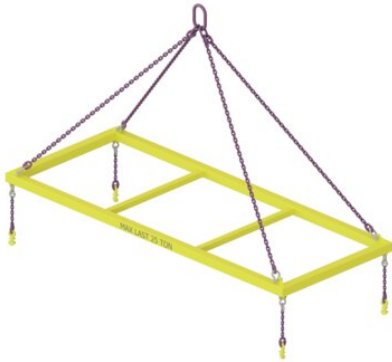

CERTEX

Lifting beam for handling standard 20-ft and 40-ft containers. Supplied complete with wire rope or chain slings, type CLB-32 or CLB-40 container hooks for attachment to container bottom fixings and type CLT for top fixings.

Design: The type C frame beam is designed for lifting from the bottom fixings. The type D frame beam is designed for lifting from the top fixings.

Proof: 1.5 x WLL.

Type C Frame beam - bottom lift.

Type D Frame beam - top lift.

Material: Hollow-beam and plate of high-strength structural steel.


Marking: Maximum load and CE mark.

Finish: Yellow painted.

Note: Manufactured in accordance with the Swedish and international standard SS-ISO 3874, which states that a lifting beam is required when handling loaded standard containers larger than 10 ft in

Container Lifting Beam Type C and D

Blueprint



Technical data

Part code	Code	WLL ton	Type	For container size (ft)	B mm	Hmm mm	Kmm mm	L mm	Weight kg	Delivery time
62056692D240	6692D-240	24	1C-1CC	20	2,260	3,600	1,100	5,850	690	10
62056692C240	6692C-240	24	1C-1CC	20	2,550	3,650	3,400	5,850	720	10
62056694D360	6694D-360	36	1A-1AAA	40	2,260	6,500	1,300	11,985	2,350	10
62056694C360	6694C-360	36	1A-1AAA	40	2,550	6,500	3,800	11,985	2,400	10