


Bolt Type Anchor Shackle Crosby G-2130

Product information

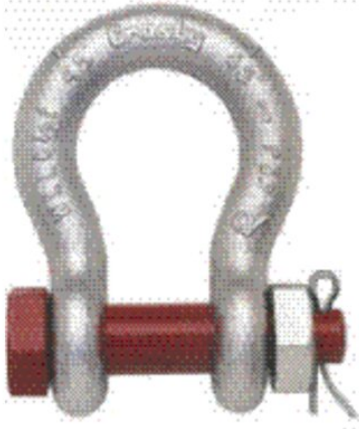

Bolt Type Anchor shackles with thin head bolt - nut with cotter pin. Meets the performance requirements of Federal Specification RR-C 271G Type IVA, Grade A, Class 3, except for those provisions required of the contractor.

Proof load: 2 x WLL.

Material: Forged – Quenched and Tempered, with alloy bolts

Marking: According to standard, CE-marked, WLL, RFID chip for 25T and higher.

Temperature range: -40°C up to +204°C

Finish: Galvanized with painted bolt.


Standard: EN 13889

Safety factor: 6:1

Grade: 6

Bolt Type Anchor Shackle Crosby G-2130

Blueprint



Technical data

Part code	WLL ton	Size inch	A mm	B mm	C mm	D mm	Emm mm	Fmm mm	Hmm mm	L mm	Mmm mm	Nmm mm	A Tolerance +/- mm	C Tolerance +/- mm	Weight kg	Delivery time
420100030250	0.33	3/16	9,7	6,4	22,4	4,9	15,2	14,2	37,3	24,9	32,8	4,85	1,50	-	0.03	10
420100050250	0.5	1/4	11,9	7,9	28,7	6,4	19,8	15,5	46,7	32,5	39,6	6,35	1,50	1,50	0.05	10
420100080250	0.75	5/16	13,5	9,7	31,0	7,9	21,3	19,1	53	37,3	46,2	7,85	1,50	1,50	0.1	2
420100100250	1	3/8	16,8	11,2	36,6	9,7	26,2	23,1	63,0	45,2	55,1	9,65	1,50	1,5	0.15	2
420100150250	1.5	7/16	19,1	12,7	42,9	11,2	29,5	26,9	74,0	51,5	63,8	11,2	1,50	3,30	0.22	2
420100200250	2	1/2	20,6	16,0	47,8	12,7	33,3	30,2	83,5	58,5	71,1	12,7	1,50	3,30	0.36	2
420100330250	3.25	5/8	26,9	19,1	60,5	16,0	42,9	38,1	106	74,5	90,4	17,5	1,50	3,30	0.62	2
420100480250	4.75	3/4	31,8	22,4	71,5	19,1	51,0	46,0	126	89,0	105	20,6	1,50	6,35	1.23	2
420100650250	6.5	7/8	36,6	25,4	84,0	22,4	58,0	53,0	148	102	122	24,6	1,50	6,35	1.79	2
420100850250	8.5	1	42,9	28,7	95,5	25,4	68,5	60,5	167	119	137	26,9	1,50	6,35	2.28	2
420100950250	9.5	1-1/8	46,0	31,8	108	28,7	74,0	68,5	190	131	150	31,8	1,50	6,35	3.75	2
420101200250	12	1-1/4	51,5	35,1	119	31,8	82,5	76,0	210	146	170	35,1	1,50	6,35	5.31	2
420101350250	13.5	1-3/8	57,0	38,1	133	35,1	92,0	84,0	233	162	183	38,1	3,30	6,35	7.18	2
420101700250	17	1-1/2	60,5	41,4	146	38,1	98,5	92,0	254	175	196	41,1	3,30	6,35	8.62	2
420102500250	25	1-3/4	73,0	51,0	178	44,5	127	106	313	225	246	57	3,30	6,35	15.4	2
420103500250	35	2	82,5	57,0	197	51,0	146	122	348	253	275	61	3,30	6,35	23.7	10
420105500250	55	2-1/2	105	70,0	267	66,5	184	145	453	327	345	79,5	6,35	6,35	44.6	2
420108500250	85	3	127	82,5	330	76,0	200	165	546	365	384	92	6,35	6,35	70	10
420112000250	120	3-1/2	133	95,5	372	92,0	229	203	626	419	432	105	6,35	6,35	120	10
420115000250	150	4	140	108	368	104	254	229	653	468	451	116	6,35	6,35	153	10