


## Ferrule TCU Talurit®

---

### Product information

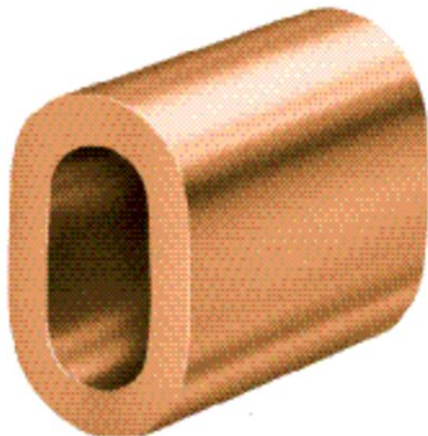

The copper ferrule (TCU) is intended for stainless steel wire rope to avoid galvanic corrosion. The pressing of TCU ferrules requires approx 25% higher pressure than the corresponding T ferrule of aluminium alloy.

**Note:**

We do not guarantee the strength of slings for lifting activities made of Copper turnback ferrules. A termination performed according to our instructions will normally withstand a tensile strength of 90% of minimum breaking load (MBL) of the wire rope. Verifying tests must be done in order to secure the strength of the termination.

These ferrules have been validated according to TALURIT™ splicing system, which is within the framework of EN 13411-3. The copper material is not accepted in this standard.

[... Read more](#)

---

**Material:** Copper (almost 99,9%)

**Marking:** According to standard

**Standard:** EN 13411-3

**Note:** See the manufacturer's product data sheet in the tab "Documents" for guidance on dimension selection.

## Ferrule TCU Talurit®

### Technical data

Part code	Ferrule size mm mm	Length mm
120100100240	1	6.5
120100150240	1.5	8
120100200240	2	9
120100250240	2.5	12
120100300240	3	14
120100350240	3.5	16
120100400240	4	18
120100500240	5	23
120100600240	6	27
120100700240	7	32
120100800240	8	36
120100900240	9	40
120101000240	10	45
120101100240	11	50
120101200240	12	54
120101300240	13	59
120101400240	14	63
120101600240	16	72
120101800240	18	81
120102000240	20	90
120102200240	22	99